

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 08-109728

(43)Date of publication of application : 30.04.1996

(51)Int.Cl.

E04F 13/08

E04C 2/30

(21)Application number : 06-246655

(71)Applicant : NICHIIHA CORP

(22)Date of filing : 13.10.1994


(72)Inventor : TAKEMURA TETSUJI
OGAWA YASUHIRO

(54) BUILDING BOARD

(57)Abstract:

PURPOSE: Not to spoil an outer appearance by making slippage almost inconspicuous even if joints of brick patterns are slightly slipped on joints of building boards.

CONSTITUTION: An end rail part 12 is formed on the top stage part and a brick pattern 13 is formed on other parts on a surface of a building board 11. This brick pattern 13 has an outer appearance as if a plural number of kinds of brick patterns were irregularly arranged differently in longitudinal breadth or in lateral breadth, dividing grooves 14 extending in the longitudinal direction by way of straddling several stages of the brick patterns are intermittently formed along the whole length of the board on a central part, and the brick patterns widest in longitudinal breadth are formed sandwiching each of the dividing grooves in such a way as to make contact with each other by way of slipping each other. Each of the dividing grooves 14 is formed wider than joints 15, 16 of the brick pattern 13 and almost as wide as the lateral breadth of a joint (caulking member) of the building board 11. Additionally, the end rail part 12 is formed thicker than a part of the brick pattern 13 so as to improve flashing.

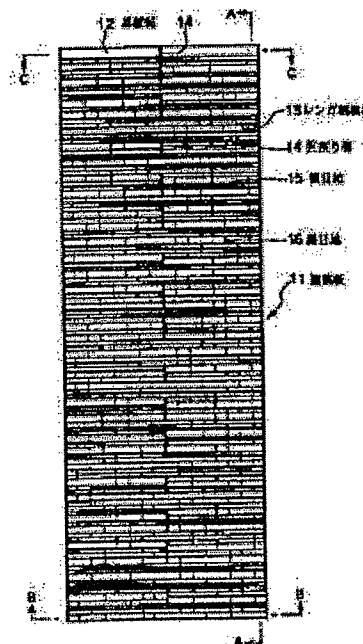

ERROR: undefinedresource
OFFENDING COMMAND: findresource

STACK:

/DefaultColorRendering
/ColorRendering
/DefaultColorRendering